

JEFLOCK Ltd.

In association with



Sliding Door Accessible Toilet Lock


Operation is simple from the outside, just a handle to slide the door open or closed, overcoming the problems related to positioning and avoiding conflict with the lock. The indicator release allows access in emergencies. Lift the lever inside to lock the door and use to slide the door open or closed.

The unique **JEFLOCK** sliding door accessible toilet lock comes in a complete set as shown in the photographs below. Available in all standard Normbau colours, the lock is also available in 5 additional antibacterial Microban colours at no additional cost. The Handle for the outside measures 510x34mm diameter as the fixing centres start at approximately 900mm above FFL, this not only aids ease to wheelchair users but also complies with minimum height recommendations of 1300mm. The inside 23mm diameter lever handle is fitted at approximately 1000mm above FFL and complies with all new legislation and recommendations.

Dimensions for the stainless steel version of the **JEFLOCK** sliding door accessible toilet lock are slightly different in that the handle is 510x25mm and the inside lever is 19mm in diameter. We suggest a 1100mm door for a clear opening of 900mm which allows a 200mm projection of door leaf when the door is in the slide open position.



Microban Normbau colours

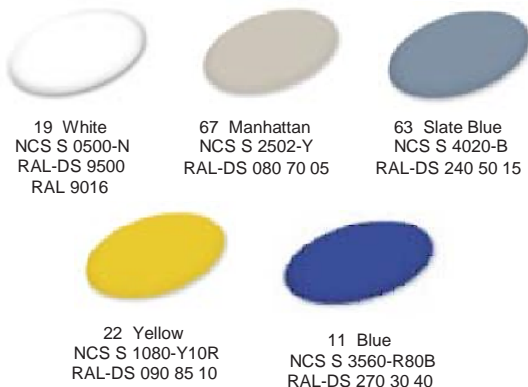

Normbau standard colours

